

# DIRECTLY PERFECT

**REPAIRING EXPOSED FLOORS  
WITH PCI ZEMTEC OUTDOOR**



**NEW!**



The directly usable, mineral coating for exterior surfaces as well as for interior areas exposed to wet conditions.

- Highly resistant to weathering, frost de-icing salt and permanent wetness
- Simple and quick to install, no top coating necessary
- Can be used on slopes of up to 2 %, the slope is maintained

# PCI ZEMTEC OUTDOOR

## REPAIRING EXPOSED FLOORS

Whether outdoor areas exposed to weather conditions, garage floors subject to stress conditions or interiors exposed to wetness: Where challenging conditions prevail, PCI Zemtec Outdoor feels at home.

The mineral coating enables high resistant surfaces from a layer thickness of 3 mm. The flowable compound is easy to process and cures quickly and without cracking. Finished floors tolerate weather conditions, frost, de-icing salt, permanent wetness and vehicles with pneumatic and solid rubber tires.

Color chips sprinkled over the surface enhance the appearance. Additional protection and easier cleaning is provided by impregnation with PCI Zemtec Protect.




The directly usable mineral coating is poured out and can be spread without effort.



Despite its liquid consistency, PCI Zemtec Outdoor can be easily applied to drains and edges without sagging.



Optically enhanced with color chips and protected with PCI Zemtec Protect, PCI Zemtec Outdoor creates a floor that can be used directly in outdoor areas exposed to weather conditions or in indoor areas exposed to wetness.

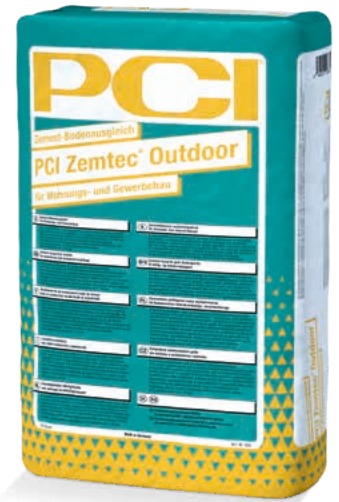

### Benefits of PCI Zemtec Outdoor

- For direct use in outdoor areas exposed to weather conditions as well as in wet or temporarily damp indoor areas
- Resistant to weathering, frost de-icing salt as well as permanent wetness
- Suitable for driving on with vehicles with pneumatic tires and solid rubber tires
- For layer thicknesses of 3-20 mm
- Can be easily applied without effort
- Consistency can be adapted by adjusting the water amount
- Can be applied on slopes up to 2 %
- Can be walked on after 4 hours, can be worked over after 2 days, able to bear weight after 7 days
- Non-slip surface (class R10)



### Additional surface protection with PCI Zemtec Protect impregnation

- Wear-resistant and non-slip (R10) colorless impregnation
- For mineral substrates indoors and outdoors
- Enables easier care and cleaning
- Easy to process and apply